

H1 hard shoulder


H1BL500

components

- W Beam 5333 mm th. 2,5 mm;
- "C" Section Post 25x60x100 mm th. 4,0 mm
H = 1630 mm c/c 3555,3 mm;
- Connection Element (Beam/Post);
- Stiffner for "C" Post;
- Unthreading proof little plate;
- Bolts and Nuts;
- Reflector (n° 1 every 16 m).

This Barrier provides, for each section of barrier, the installation of Approach /Escape End Section modules for a total length of 21,332 m (10,666 for Approach+ 10,666 for Escape)

section

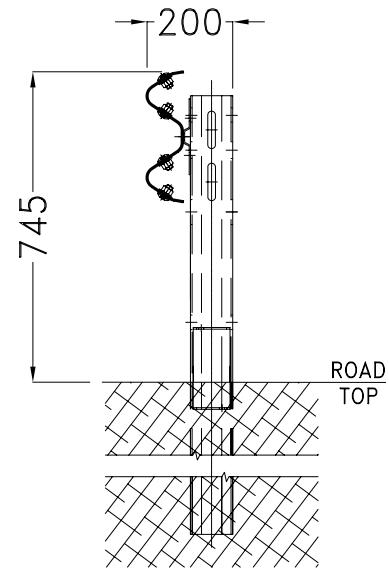

● DIS.: H1BL500

c/c distance between the posts: **3.555,3 mm**

performance

TB11 - Car 900 kg


Test: 1260
ASI: A - 0,40

TB42 - Truck 10.000 kg

Test: 1259
 W_N : m 1,0 (W3)
 D_N : m 0,9
 V_{I_N} : m 1,6 (VI5)

FRONT VIEW

mm 85332,8

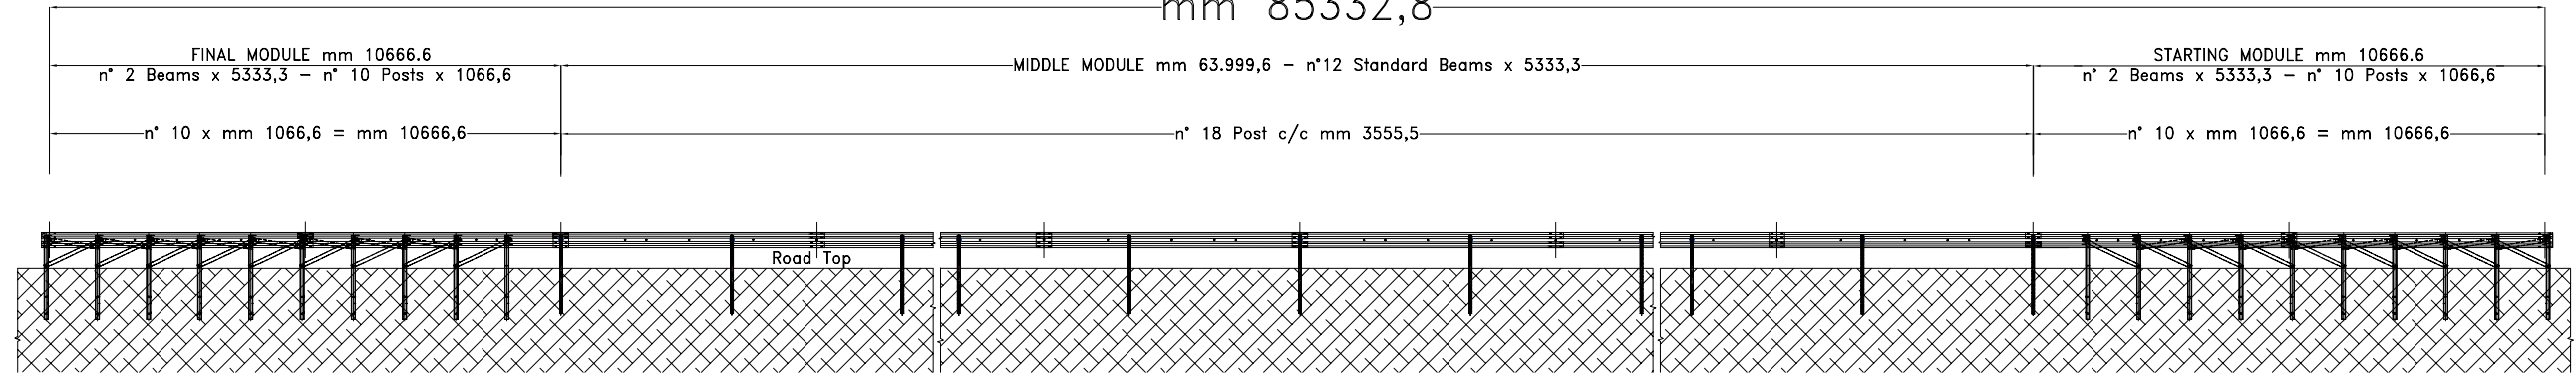

← TRAFFIC DIRECTION (Impact on the Right)

TOP VIEW

