

H2 (L2) median barrier on embankment


H2ST-R200

components

- 2 W Beam 5333 mm th. 3,0 mm;
- "C" Section Post 30x80x120 mm th.4 ,0 mm
H = 1680 mm c/c 1777,6 mm;
- Connection Element (Beam/Post);
- Unthreading proof little plate;
- Bolts and Nuts;
- Reflector (n° 1 every 10, 66 m).

This Barrier provides, for each section of barrier, the installation of mitred Approach/ Escape modules for a total length of 19,046 m (9,523 for Approach+ 9,523 for Escape)

section

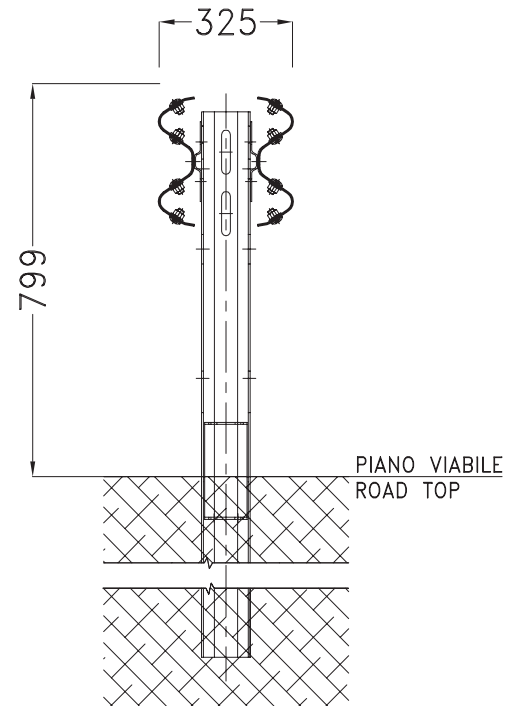

- **Dwg. n.: H2ST-R200**
c/c distance between the posts: **1.777 mm**

performance

TB11 - Car 900 kg


Test: 1321
ASl: A - 1,00

TB32 - Car 1.500 kg

Test: 1322
ASl: A - 0,6

TB51 - Bus 13.000 kg

Test: 1320
W_N: m 1,2 (W4)
D_N: m 1,0
Vl_N: m 1,3 (VI4)

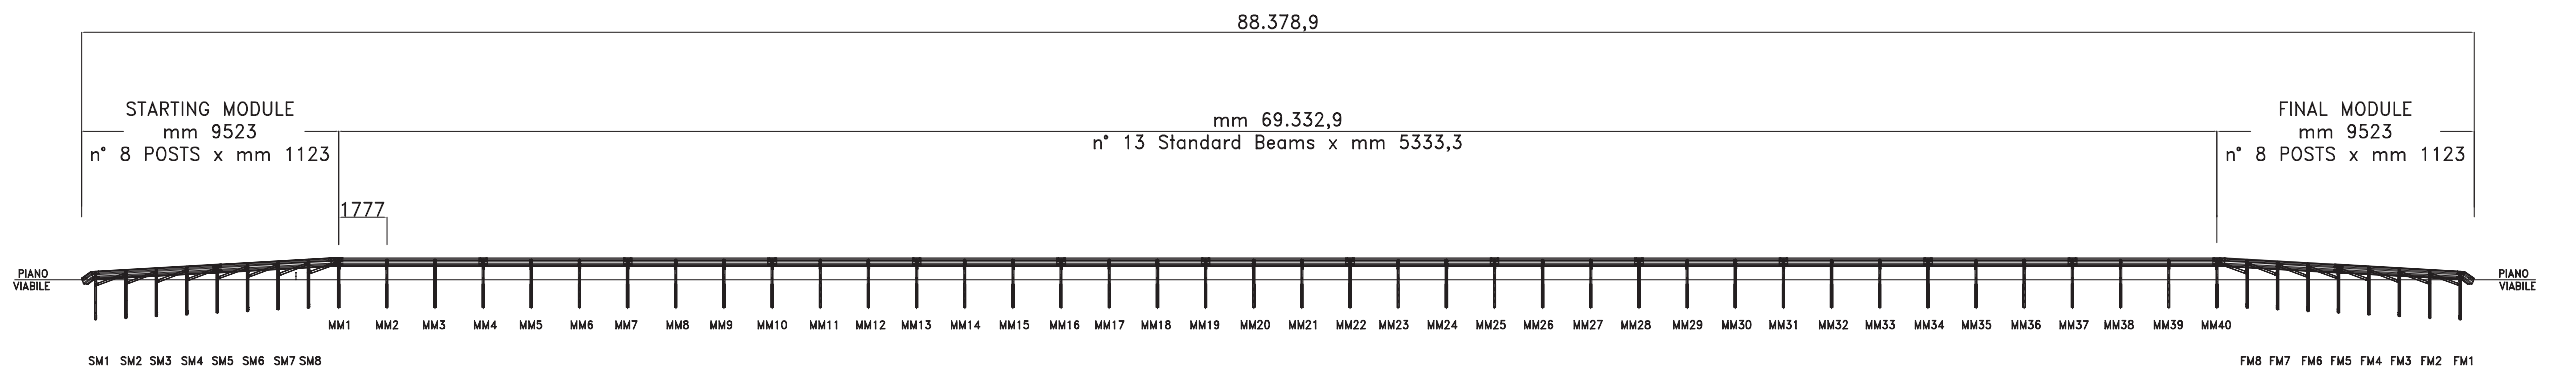

TRAFFIC DIRECTION (Impact on the LEFT) →

