

» H4 (L4b) bridge barrier


H4BP700

components

- Upper W beam 4500 mm th. 5,0 mm;
- Lower W beam 4500 mm th. 2,5 mm;
- Post "HEA100" H = 1265 mm with base plate; c/c mm 1200;
- "Z" shape Spacer for lower 3W beam;
- Intermediate proof little plate;
- Untreading proof little plate;
- Bolt and Nuts;
- Anchorbolt M20;
- Reflector (n° 1 every 8,00 m).

This Barrier provides, for each section of barrier, the installation of Approach/Escape section modules for a total length of 19,20 m (9,60 for Approach + 9,60 for Escape)

section

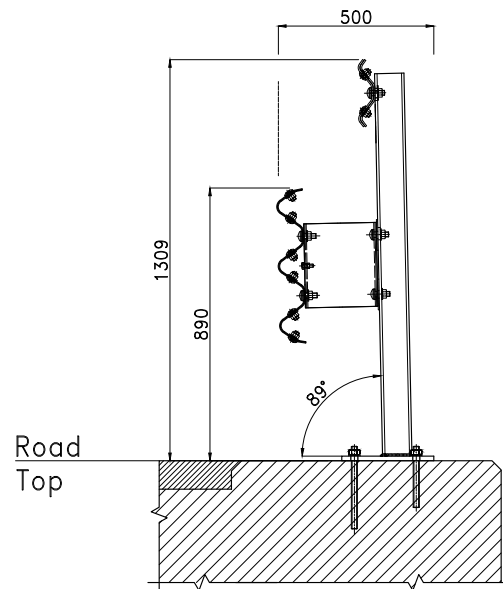

- Dwg. n.: H4BP700
c/c distance between posts: 1.200 mm

performance

TB11 – Car 900 kg

Test: 1650

ASl: B

TB32 – Car 1.500 kg

Test: 1651

ASl: B

TB81 - Truck 38.000 kg


Test: 1649

W_N: m 0,8 (W2)

D_N: m 0,4

V_N: m 1,0 (V13)

FRONT VIEW

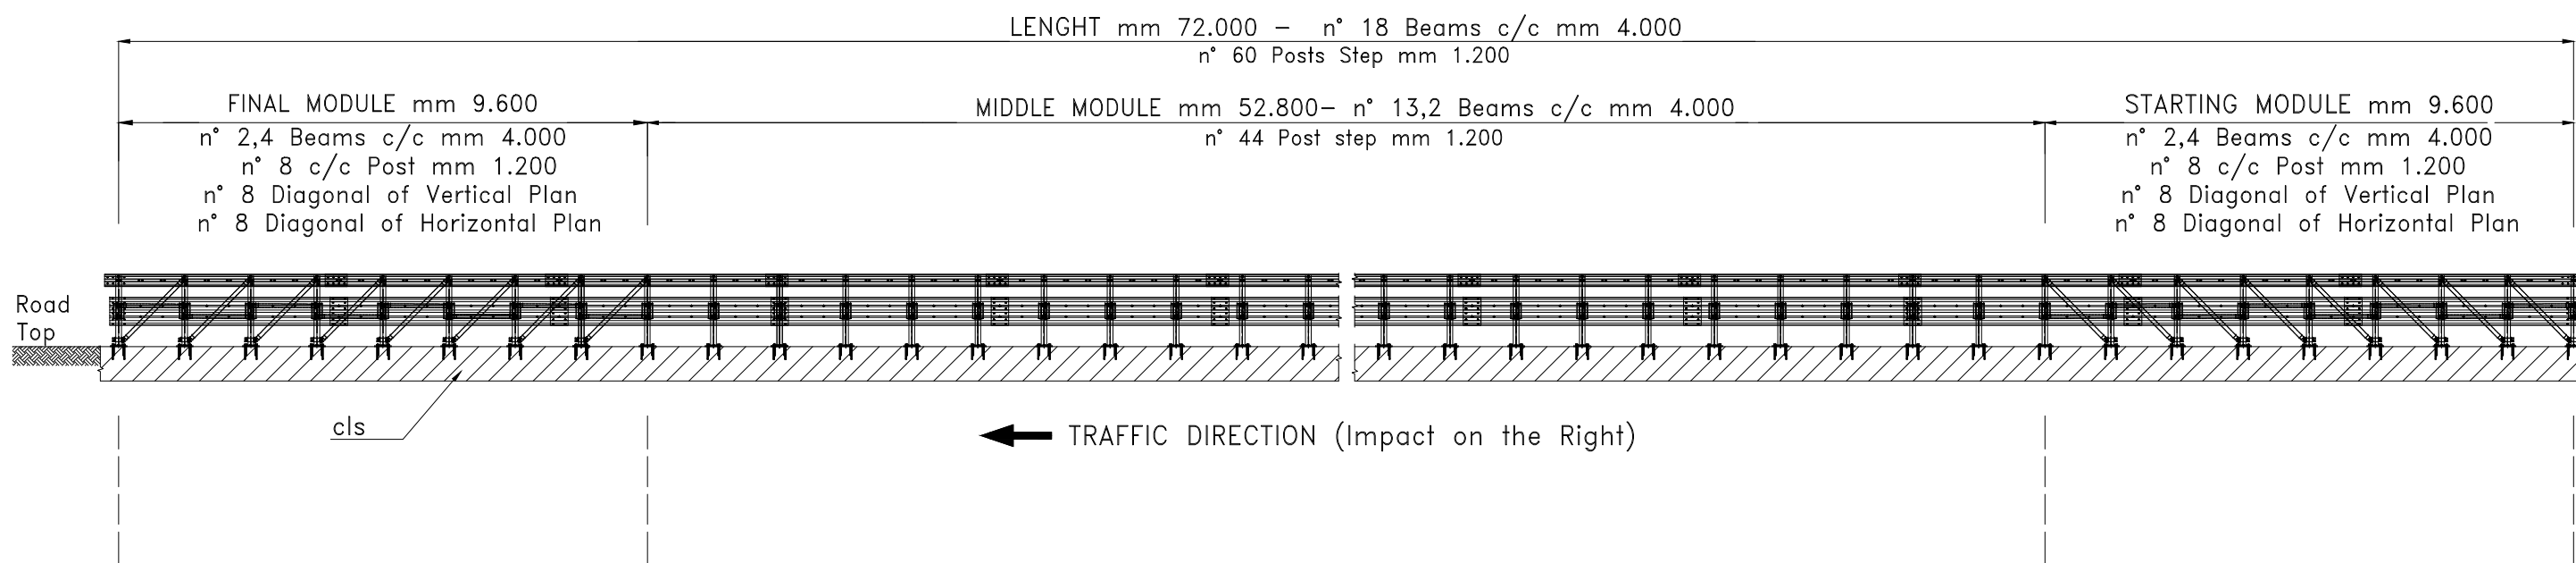

TOP VIEW



